

Liquefaction Probabilities Of Semani Area, In Albania Corresponding To Different Levels Of Safety

Shkëlqim Daja¹, Neritan Shkodrani², Besnik Ago¹

¹ *Polytechnic University of Tirana, Faculty of Geology and Mining, Albania*

² *Polytechnic University of Tirana, Faculty of Civil Engineering, Albania*

ABSTRACT

In this paper the liquefaction potential of Quaternary soft non-cohesive soils at Semani site, Fier prefecture in Albania has been assessed.

The liquefaction analyses have been computed considering the hazard level corresponding to different levels of safety, such as 10% in 10 years (72-years Return Period), 10% in 50 years (475-years RP) and 2% in 50 years (2475-years RP). The accelerations corresponding to the abovementioned hazard levels are calculated using PSHA (probabilistic seismic hazard assessment), and The Cyclic Stress Ratio is calculated for each acceleration. The seismological data used in the analyses considers earthquakes with $M_S \geq 4.5$ and covers a time span from 58 up to 2009.

The calculation of cyclic resistance ratio (CRR) of the soils is based on 416 SPT (Standard Penetration Test) values, 12 CPTU tests up to 25 m depth and shear wave velocity (V_s) measurements.

The liquefaction probabilities for a given seismic event are combined with the probability of occurrence of the seismic event in order to obtain the real probability of liquefaction during the life span of the structures.

INTRODUCTION

The study area is situated at the South West of the village Hoxhara, near the Adriatic coastline. The Quaternary's deposits composed of marshy and maritime deposits are represented by gravel, sand, silty sand, silty clay, and clays. These layers are slightly or normally consolidated. These soft deposits have a thickness of more than 100.00 m with ground water table near the ground level (0.5 m to 1.0 m). Within the first 20 m, two main porous aquifers bound to sandy soils exist, presenting specific seasonal variations. These geological and hydrogeological conditions are put into question if during strong earthquakes, like in other places with soft soils, liquefaction can take place. During the earthquake of Fier (18/03/1962), with $M_s = 6.2$, liquefaction phenomena were observed causing lateral spreading up to 40 cm with length reaching up to 100 m. This earthquake caused 35 victims.

A geotechnical model of study area is made based on the geotechnical investigations conducted in July - August 2006. The geotechnical investigation consists in 12 boreholes (ten borings of a depth 30 m and two borings of a depth 80.m), 416 SPT (Standard Penetration Test) N - values, 12 CPTU tests up to 25 m depth and shear wave velocity (V_s) measurements (Figure 1). These geotechnical investigations cover an area of about 216 Hectares.

For the first twenty meters this model is as follows:

Top soil and made ground represented by Silty Clay with organic matter encountered at depths 0.8 to 1.0 m from the ground level. Below this layer a loose green grey fine to medium SAND containing beds of silty sand and organic matters is encountered at the depths 2.0 m to 6.5 m. From 4.5 to 15 m soft green grey silty CLAY containing beds of silty sand, organic matters and fragments of shells is encountered. From 15 m to 18 m medium dense green grey fine to medium SAND are encountered. The rest from 18 m to 20 is composed by soft silty clays [1].

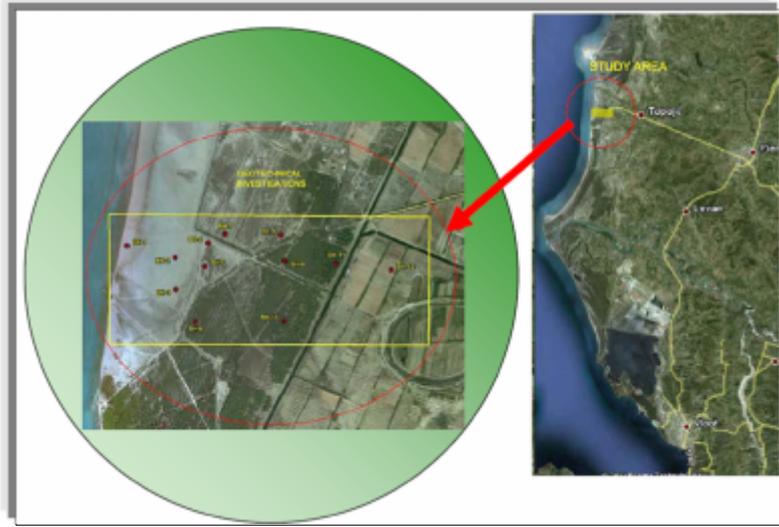


Figure 1. Geographic location of the study area

WHY THE LIQUEFACTION ANALYSES IN THE SEMANI AREA?

The phenomenon of dynamic liquefaction occurs in sand deposits, silt and fine gravel of late Pleistocene or Holocene age, with water table located less than 15 m below the surface.

The areas at risk of liquefaction are those associated with sandy and silty soils of low plasticity and density. The cohesive soils with fine content (particles <0.005 mm in diameter) greater than 15% are generally considered not liquefiable. Some gravely soils are vulnerable to liquefaction if interposed between layers that prevent the rapid dissipation of pore pressure induced by the earthquake.

A preliminary qualitative analysis of the risk of liquefaction can be made on the basis of the following conditions [2]:

- Ground water table near the ground level,
- Holocene deposits (sand, coarse sand, fine sand, silty sand and sandy silt),
- Evidence of ancient liquefaction phenomena,
- Seismic activity in the area,
- Depth of liquefiable layers less than 20 m, however for vertical stress less than 200 kPa.

All the above mentioned conditions are fulfilled for the study area and consequently the soils can be considered susceptible to liquefaction.

LIQUEFACTION ASSESSMENT AT SEMANI AREA

• Cyclic Stress Ratio, CSR

The cyclic stress ratio, CSR, is a measure of the seismic induced stress, expressed as equivalent uniform cyclic stress, divided by the initial effective overburden pressure. The average uniform cyclic stress ratio within a liquefiable stratum at representative depth of the dynamic loading imposed by the earthquake is given by Seed and Idriss (1971):

$$CSR = \frac{\tau_{av}}{\sigma_{vo}} = 0.65 \cdot \left(\frac{a_{max}}{g} \right) \cdot \left(\frac{\sigma_{vo}}{\sigma'_{vo}} \right) \cdot r_d$$

where, CSR is the Cyclic shear Stress Ratio; σ_{v0} - total overburden pressure; σ'_{v0} - effective overburden pressure; a_{max} - maximum surface acceleration in units of g; g - gravity acceleration and r_d is a stress reduction factor which is dependent on depth.

Three values of a_{max} , corresponding to three hazard levels are used in CSR calculation. For the first hazard level (earthquakes with 50% probability of being exceeded during the life-span of a structure) the evaluated maximum acceleration is $a_{max}=0.25$ g; for the second hazard level (earthquakes with 10% probability of being exceeded during the life-span of a structure) the evaluated maximum acceleration is $a_{max}=0.388$ g while for the third hazard level (earthquakes with 2% probability of being exceeded during the life-span of a structure) the evaluated maximum acceleration is $a_{max}=0.487$ g [3].

The total (σ_v) and effective (σ'_v) vertical stresses are estimated from the geotechnical data available for the site.

The relations proposed by Liao and Whitman (1986) use a function of r_d that is dependent only on soil depth as follow:

$$r_d = 1.0 - 0.00765z \quad \text{if } z < 9.15 \text{ m}$$

$$r_d = 1.174 - 0.0267z \quad \text{if } z = 9.15 \text{ to } 23 \text{ m}$$

The CSR is corrected by an additional safety factor (f_{st}), which typical value is 1.2, for taking into account the influence of the pore pressure changes and strain developed during the ground motion ($CSR f_s$). A soil is predicted to liquefy if $F_s \leq 1.2$ (Sonmez, 2003).

$$CSR f_s = CSR \cdot f_{st}$$

- **Cyclic Resistance Ratio, CRR**

The cyclic resistance ratio is calculated for an earthquake of $M_s=6.1$ and the calculation are based on CPT, SPT and VS measurements.

- **Soil profile from CPT data**

From the CPT-data the soil type index, I_c , defined by Robertson and Wride (1998), permits to obtain a detailed lithological depth profile using the following equation:

$$I_c = \left[(3.47 - \log Q)^2 + (1.22 + \log F)^2 \right]^{0.5}$$

Where:

Q = the normalized cone penetration resistance, dimensionless

$$Q = \left[(q_c - \sigma_{v0}) / P_a \right] * \left[(P_a / \sigma'_{v0})^n \right]$$

With:

σ_{v0} and σ'_{v0} are the initial total and effective overburden stresses, respectively; P_a is a reference pressure in the same units as σ'_{v0} , q_c and σ_{v0} .

The stress exponent n , in the formula for calculating the resistance of the soil Q varies in relation to soil type. For clean sands the value is 0.5, silt and silty sands an appropriate value is between 0.5 and 1.0 ($n = 1$ characteristic of the clay). The iteration procedure proposed by Robertson (1990) is used to evaluate n and the I_c index used to define the soil type.

$$F = \text{normalized friction ratio defined as } F = \left[f_s / (q_c - \sigma_{v0}) \right] * 100\%$$

f_s is the CPT sleeve friction stress and q_c is the measured soil resistance.

The soil type index I_c helps among others to restrict the probability of liquefaction to soils with $I_c < 2.8$ (Yuang et al., 2003)

- **Cyclic Resistance Ratio, CRR7.5 based on CPT data**

The cyclic resistance ratio of clean sands, for a magnitude of 7.5 ($CRR_{7.5}$), after Robertson and Wride (1998) has the following equations:

$$CRR_{7.5} = 0.833 \left[(q_{c1N})_{cs} / 1000 \right] + 0.05 \quad \text{for } (q_{c1N})_{cs} < 50$$

$$CRR_{7.5} = 93 \left[(q_{c1N})_{cs} / 1000 \right]^3 + 0.08 \quad \text{for } 50 \leq (q_{c1N})_{cs} < 160$$

With $(q_{c1N})_{CS}$ the normalized cone penetration resistance corrected for the fine content influence as follow:

$$(q_{c1N})_{cs} = K_c * q_{c1N}$$

Where K_c is the correction factor for particle size characteristics, defined by the following equation (Robertson and Wride, 1998):

$$K_c = 1.0 \quad I_c \leq 1.64$$

$$K_c = -0.403I_c^4 + 5.581I_c^3 - 21.63I_c^2 + 33.75I_c - 17.88 \quad I_c > 1.64$$

and (q_{c1N}) is the normalized (stress-adjusted) cone penetration resistance defined as follow: .

$$(q_{c1N})_{cs} = C_q * (q_c / P_a)$$

$$C_q = (P_a / \sigma'_{v0})^n, \text{ normalized tip resistance factor}$$

- **Cyclic Resistance Ratio (CRR) based on SPT data**

The N-value of SPT, measures the penetration resistance of the granular soil, which is directly related to its liquefaction resistance (CRR).

The N-value of SPT is normalized to a hammer energy ratio of 60% $(N)_{60}$, while the $(N1)_{60}$, used as a dependent variable in the probability relations, represents the normalized penetration resistance of the soil under an effective overburden pressure of 100 kPa.

$$(N1)_{60} = (N_{SPT} \cdot C_E \cdot C_B \cdot C_R \cdot C_S) \cdot C_N = (N)_{60} \cdot C_N$$

where, N_{SPT} is N-value of SPT; C_E - hammer energy efficiency correction; C_B - borehole diameter correction; C_R - "short" rod length correction; C_S - non-standardized sampler configuration correction and C_N is the effective overburden pressure correction.

According to Liao and Whitman (1986) the C_N is estimated as below:

$$C_N = \left(\frac{P_a}{\sigma'_{v0}} \right)^{0.5}$$

Where, σ'_{v0} is the actual effective overburden stress at the depth of the SPT.

For the purposes of assessing susceptibility to liquefaction, it is important to consider not only the severity of the ground motion, as quantified by the ground motion acceleration, a_{max} , but also the duration of shaking. It is known the earthquake magnitude is an appropriate dependent variable for any functional parameterization of duration. For this purpose, Rauch (1998) presents a magnitude (7.5) normalized form of the cyclic resistance ratio ($CRR_{7.5}$).

$$CRR_{7.5} = \frac{1}{34 - (N1)_{60}} + \frac{(N1)_{60cs}}{135} + \frac{50}{[10 \cdot (N1)_{60cs} + 45]^2} - \frac{1}{200}$$

Where, $(N1)_{60cs} = \alpha + \beta \cdot (N1)_{60}$ as proposed by Youd and Idriss (1997) for the influence of fine content (FC) in the normalized cyclic resistance ratio, with α and β given as follow: for $FC < 5\%$ $\alpha = 0$ and $\beta = 1$; for $FC > 35\%$ $\alpha = 5$ and $\beta = 1.2$; for FC between 5% and 35% the parameters are given by the following equations:

$$\alpha = \exp \left[1.76 - (190 / FC^2) \right]$$

$$\beta = 0.99 + FC^{1.5} / 1000$$

- **Cyclic Resistance Ratio (CRR) based on shear wave velocity (V_S)**

The resistance of the soil to liquefaction, expressed as a cyclic resistance ratio (CRR) can be estimated by the equation proposed by Andrus and Stokoe (1997) as follow:

$$CRR = \left[a \left(\frac{V_{s1}}{100} \right)^2 + b \left(\frac{1}{V_{s1}^* - V_{s1}} - \frac{1}{V_{s1}^*} \right) \right]$$

Where V^* = limiting upper value of V_{s1} for cyclic liquefaction occurrence; a and b = curve fitting parameters respectively 0.022 and 2.8.

Values of V^*_{s1} are assumed to range linearly from 200 to 215 m/s. The relationship between V^*_{s1} and fines content can be expressed by:

$V^*_{s1} = 215$ m/s for sands with FC up to 5%; $V^*_{s1} = 215 - 0.5(FC-5)$ m/s for sands with FC between 5% and 35 % and $V^*_{s1} = 200$ for sand with FC greater or equal than 35 %.

V_{s1} is overburden stress-corrected shear-wave velocity defined by Sykora (1987); Robertson et al. (1992) as,

$$V_{s1} = V_s C_v = V_s \left(\frac{p_a}{\sigma'_v} \right)^{0.25}$$

C_v = factor to correct measured shear-wave velocity for overburden pressure; for shallow depths the maximum C_v value of 1.4 is generally applied to V_S data.

- **Magnitude Scaling Factors**

The CRR value calculated for an earthquake of magnitude of 7.5. The cyclic resistance ratio for the given magnitude (CRR_M) is calculated by introducing the magnitude scaling factor (MSF) as follow:

$$CRR_M = CRR_{7.5} \cdot MSF$$

This factor is traditionally applied to CRR, and equals 1.0 for earthquakes with a magnitude of 7.5. For magnitudes other than 7.5, magnitude scaling factors are developed by various investigators.

For the CRR calculation for the given magnitude the following relations are used:

- For CRR calculated using CPT and SPT data, for earthquakes with magnitude lower than 7.5 the relation proposed by Youd et al (2001) is used, $MSF = 10^{2.84} / M^{3.24}$.
- For CRR calculated using shear wave velocities (V_S) the relation proposed by Andrus & Stokoe (1997) is used: $MSF = \left[\frac{M}{7.5} \right]^{-2.56}$

Further correction was made to CRR_M for the shear resistance and the effective lithostatic stress as proposed by Idriss (1983). The equivalent Cyclic Resistance Ratio (CRR_{eq}) is obtained as follows: $CRR_{eq} = CRR_M \cdot K_\sigma \cdot K_\alpha$, with $K_\alpha = 1$ for horizontal areas.

NCCER (Youd, 1997) suggested:

$$\begin{aligned} \text{for } \sigma'_{v0} / P_a \leq 1 & \quad K_\sigma = 1; \text{ and} \\ \text{for } \sigma'_{v0} / P_a > 1 & \quad K_\sigma = (\sigma'_{v0} / P_a)^{-0.25} \end{aligned}$$

- **Safety Factor**

The Safety Factor of Liquefaction, FSL, is expressed as the ratio of Cyclic Stress Ratio (demand) and the Cyclic Resistance Ratio (capacity):

$$FS_L = \frac{CRR_{eq}}{CSR_{fs}}$$

PROBABILITY CALCULATION

Probability of liquefaction assessment involves two stages: 1) calculation of liquefaction for a given seismic event, and 2) combination with the probability that this event occurs.

- **Liquefaction probability**

Based on conventional probability theory, the probability of liquefaction, for the given seismic event, is calculated from the FS_L using different correlations proposed by several authors.

In this study the relation proposed by Chen and Juang (2000) is used for the liquefaction probability SPT and V_S based FS_L calculation, while for CPT based FS_L calculation it is used the correlation proposed by Juang et al (2006).

$$P[\text{Liquefaction} |_{PGA=a}] = \frac{1}{1 + (FS_L/0.77)^{3.25}} \quad \text{Chen and Juang (2000)}$$

$$P[\text{Liquefaction} |_{PGA=a}] = \frac{1}{1 + (FS_L/0.74)^{5.45}} \quad \text{Juang (2006)}$$

The likelihood of liquefaction can be interpreted using the calculated P_L values in Table 1. It can be seen in Table 1, that liquefaction will occur only if the probability of liquefaction is greater than 35%. The calculated probability permits to observe if a layer is susceptible to liquefy during a specific earthquake.

Table 1. The classification of probability of liquefaction

| Probability | Likelihood of liquefaction |
|-----------------------|---|
| $0.85 \leq PL < 1$ | Almost certain that it will liquefy |
| $0.65 \leq PL < 0.85$ | Very likely |
| $0.35 \leq PL < 0.65$ | Liquefaction/non-liquefaction is equally likely |
| $0.15 \leq PL < 0.35$ | Unlikely |
| $0.00 \leq PL < 0.15$ | Almost certain that it will not liquefy |

- **Conditional (Real) Probability**

Given an evaluation of the probability of liquefaction occurring from a seismic event, $P[\text{Liquefaction} |_{PGA=a}]$ and given the probability that the seismic event occurs, $P[E |_{PGA=a}]$, we may estimate the joint probability as follow:

$$P[L] = P[\text{Liquefaction} |_{PGA=a}] * P[E |_{PGA=a}]$$

RESULTS

The liquefaction probabilities, $P[\text{Liquefaction} |_{PGA=a}]$ of the sandy soil layers for each borehole are calculated based on CPTU and SPT results, whereas a simplified model was used for the calculation of V_S - based probabilities.

The results show that layers susceptible to liquefaction are liquefiable for the first level of seismic hazard, to which corresponds an acceleration of $PGA = 0.25g$. The sandy layers are encountered in the depth intervals from 1.2 to 6-7 m, reaching a maximum down to 10 m (Figure 2). The second interval of the liquefiable layers is found from 15 to 20 m. For this acceleration, the calculated probabilities based on CPTU, SPT and Vs data have higher values than 35%. Based on liquefaction probability classification according to Chen and Juang (2000), for these layers liquefaction/non-liquefaction is equally likely. In-between these layers however, there were encountered levels for which liquefaction is very likely or almost certain.

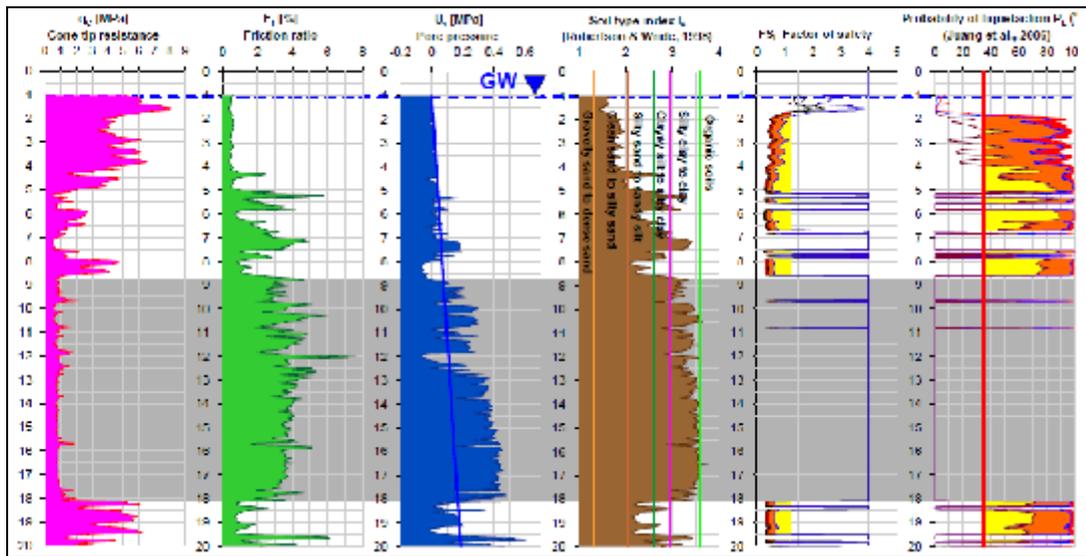


Figure 2 Example of liquefaction probability calculation based on CPT data

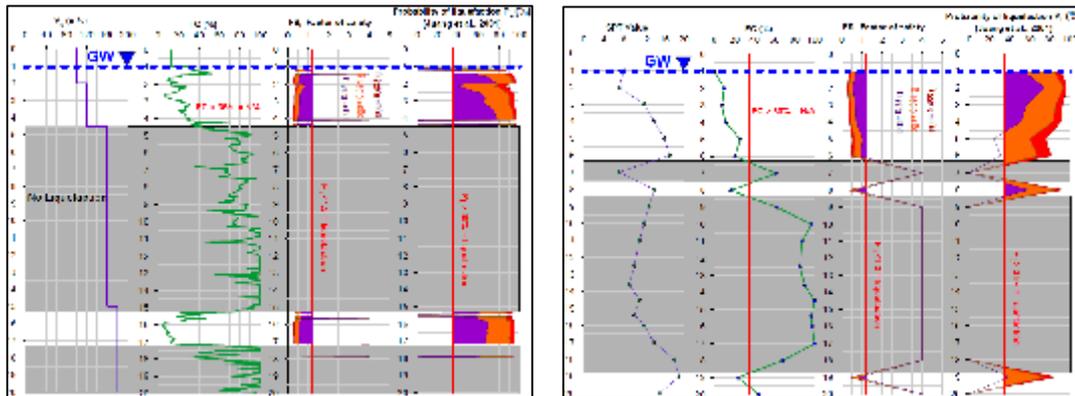


Figure 3. Liquefaction probability calculation based on V_s model (left) and SPT data (right)

Considering the first level of hazard with $a_{max}=0.25 g$ (50% probability of exceedance during the life span of the structures) the real probability of liquefaction $P[L]$ of the liquefiable soils reaches values of varies from 15 % to 40-45 %. For the second and third level of hazard even though the liquefaction probabilities increase, the real probabilities decrease due to the smallest possibility of the occurrence of such seismic events.

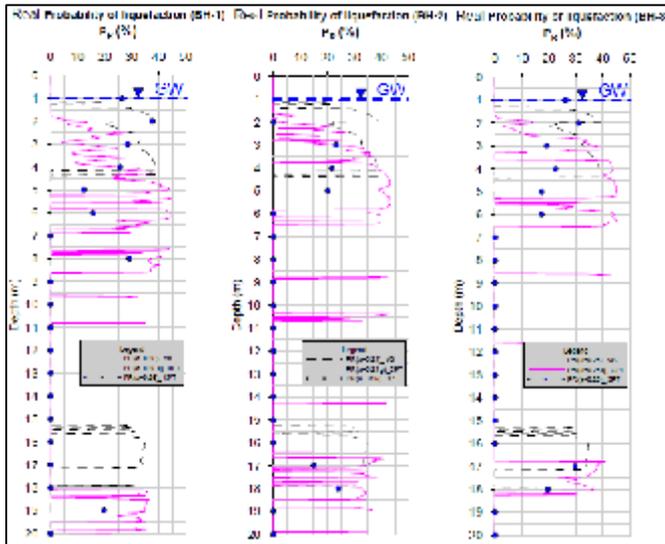


Figure 4. Real probability of liquefaction.

The sandy layers encountered in the first 20 m are susceptible to liquefaction. The real probabilities calculated for the first hazard level reaches values of 40 %, so during the life span of structure liquefaction phenomenon may be observed.

The V_S based probabilities are similar to those calculated via CPT whereas the probabilities calculated via SPT are slightly lower for depths higher than 10 m.

REFERENCES

- [1] ALLKJA S. (2006), Geological-Engineering Conditions of Construction site at P.N.G. Terminal-Power Plant Semani, Geotechnical Report, p. 136.
- [2] RIGA G. (2008), Microzonazione sismica: Procedure per elaborare una carta di pericolosità sismica, p. 268.
- [3] Shkodrani, N., Daja, S. (2010), Engineering Characteristics of the Expected Shaking at Semani Site in Albania, *ACEE – 2010, Proc. 3rd Asia Conference on Earthquake Engineering, Disaster Risk Reduction and Capacity Building for Safer Environments*, Bangkok, Thailand 01-03 december 2010
- [4] Chen, C.J., Juang, C.H. (2000), Calibration of SPT- and CPT-based liquefaction evaluation methods. In: Mayne, P.W., Hryciw, R. (Eds.) *Innovations and Applications in Geotechnical Site Characterization, Geotechnical Special Publication, vol. 97*. ASCE, Reston, VA, pp. 49-64
- [5] Robertson, P. and Wride, C. (1998), Evaluating cyclic liquefaction potential using the cone penetration test, *Canadian Geotechnical Journal*, Vol. 35, No. 3, pp. 442-459.
- [6] Seed, H.B. and Idriss, I.M. (1971), Simplified procedure for evaluating soil liquefaction potential, *Journal of Geotechn. Engin. Division*, ASCE, Vol. 97, No. 9, pp. 1249-1273.
- [7] Sonmez, H. (2003), Modification to the liquefaction potential index and liquefaction susceptibility mapping for a liquefaction-prone area (Inegol-Turkey), *Environmental Geology*, 44 (7), pp. 862-871
- [8] Kramer S. (1996), *Geotechnical Earthquake Engineering*, Prentice Hall, New Jersey, p. 653.

CONCLUSIONS

For the first time a liquefaction risk analysis for the Semani area was performed. The CPT-field data executed in 2006 were of high quality. We cannot say the same thing for SPT tests and measurements V_S .

The investigations reached optimal depths of 30 m, allowing the accurate evaluation of the liquefaction probability and the real probability at Semani area.